



MimioProjector 280i interactive projector

Want your projector to be more than just a projector? If you're interested in a simple and affordable way to bring interactive teaching into the classroom, get the MimioProjector™ interactive projector. Just mount, plug into a computer, and bring your lessons, graphics, and images to life on a conventional dry erase board.

“[MimioProjector] is a strong contender... as either a non-interactive or interactive 1280 x 800 ultra-short-throw model, and it's well worth a close look.”

Marc Davidson
ProjectorCentral.com

You know your students live in a world of technology. So you know technology can help hold their attention. But you have a budget. If your classrooms already have dry erase boards but do not have projectors, the MimioProjector interactive projector lets you bring interactive teaching into your classrooms without breaking the bank.

- An affordable way to bring interactive technology into classrooms that don't already have projectors.
- Includes the MimioStudio™ classroom software that controls all MimioClassroom™ products. Makes it simple to create and deliver engaging lessons.
- With the two included pens and Windows 7 or higher*, two students can simultaneously interact with the same projected image, enhancing collaborative learning.
- NEW: Up to ten pens may be used simultaneously by buying additional pens from Mimio.
- Ultra-short-throw design reduces shadows on the whiteboard.
- NEW: Even brighter and more vibrant images with 3100 lumens.
- Bulb can be replaced without dismantling the MimioProjector device. Up to 5000 hours between bulb replacements.
- Can be ordered as a non-interactive, conventional projector, and later upgraded to full interactive status – without dismantling it.



Multi-pen functionality, field upgradeable. Sharp WXGA images.

To learn more, visit mimio.com/mimioprojector280i or call 877.MY.MIMIO.

* On editions that natively support multiple-input.

mimio[®]
a better way to learn

Key Features

Package Contents

Projector, interactive module, 2 interactive pens, MimioStudio software license, power cord-4m, VGA cable-5m, Audio cable-5m, mini-USB cable-5m, remote with battery, wall-mount.


Specifications

Software Requirements	MimioStudio 11 and higher on a Windows, Mac, or Linux OS
Brightness	3100 lumens
Lamp	280 Watt OSRAM E20.9n (replaceable without dismounting projector)
Lamp Life*	Normal mode 3,000 hours. Eco mode 4,000 hours.
Native Aspect Ratio	16:10. Also supports 4:3 and 16:9 aspect ratios.
Native Resolution	1280 x 800 (WXGA)
Image Size Supported	WXGA 16:10, 70" - 130"
Keystone Correction	Vertical: ±15 degrees (manual)
Contrast Ratio	Native 2000:1
Color Reproduction	1.07 billion colors (R/G/B 10 bit)
Color Temperature	Adjustable from 6500° K - 8300° K
Color Uniformity	- ΔU'V' < 0.03
Projection Lens	F 2.6 fixed zoom
Throw Ratio Range	WXGA 0.35
Zoom Ratio	Digital zoom 1.0 – 2.0X
Focus Type	Manual
Projection System	Digital Light Processing (DLP), utilizing a 6-segment color wheel.
Projection Method	Front / Wall Mount, Tabletop Mount
Input Signal	NTSC/PAL/SECAM video capability with S-video / composite / YPbPr Component
Resolutions	1080p/UXGA/WXGA/XGA/SVGA/MAC compatibility
Video Inputs	1 HDMI, 2 VGA, 1 S-video, 1 composite analog
LAN Connectivity	RJ45 Ethernet connector
LAN Control Protocols	Creston/AMX/PJ Link
Closed Captioning	Based on TI DDP4421 spec, CC1/CC2/CC3/CC4 supported
3D Capabilities	DLP Link 3D and HDMI 1.4a 3D supported
Audio	Two 3.5-mm stereo line level, two stereo RCA jack line level, one 3.5-mm audio out, one 3.5-mm microphone.
Input sensitivity	1 kHz, 0.5 Vrms sine wave
Speaker	8 watts stereo (16 watts total output)
Operating Temperature	5 - 40° C (41 - 104° F)


Humidity	Operating and Storage: 80% RH (Max.), Non-condensing
Fan Noise	Full mode: 37±2dB (A), w/o filter ECO mode: 33±2dB (A), w/o filter
Power Supply Voltage	Universal AC 100 – 240 V~50-60 Hz with PFC input
Power Consumption	Normal Mode: 350 W+/-10%@110 VAC ECO Mode: 290 W+/-10%@110 VAC Standby: < 0.5 W
Interactive Technology	560 x 1920 (interpolated); 640 x 480 (Native)
Detection Frame Rate	60 fields-per-second providing 16.6 ms response time
Interactive Area	75" to 115" diagonal
Tracking Resolution	2560 x 1920 (interpolated); 640 x 480 (Native)
Interactive Devices	Pen (2 included)
Pen Attributes	15.2 cm L x 1.5 cm W (6.0 in. L x 0.6 in. W), 34 g (1.2 oz) (without battery)
Interactive Connectivity	mini-USB cable provided
Visible Alignment Lasers (3 adjustment levels)	Wavelength 650 nm (nanometers) Optical power < 0.39 mW (milliwatt) Dot size at focus distance 10 mm
Security	Kensington lock ≥36 Kg

Dimensions and Weight

Projector

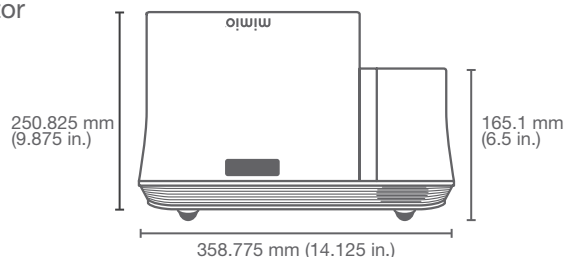

Weight: 8 kg
(17.6 lb)

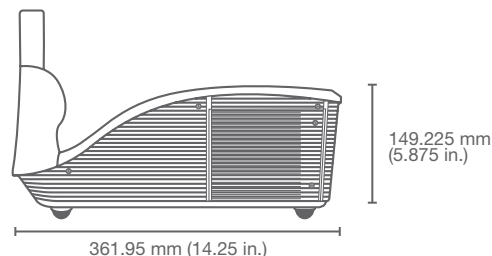

To learn more, visit mimio.com/mimioprojector280i or call 877.MY.MIMIO.

* Lamp life will vary depending upon environmental conditions and usage. Lamp brightness decreases over time.